
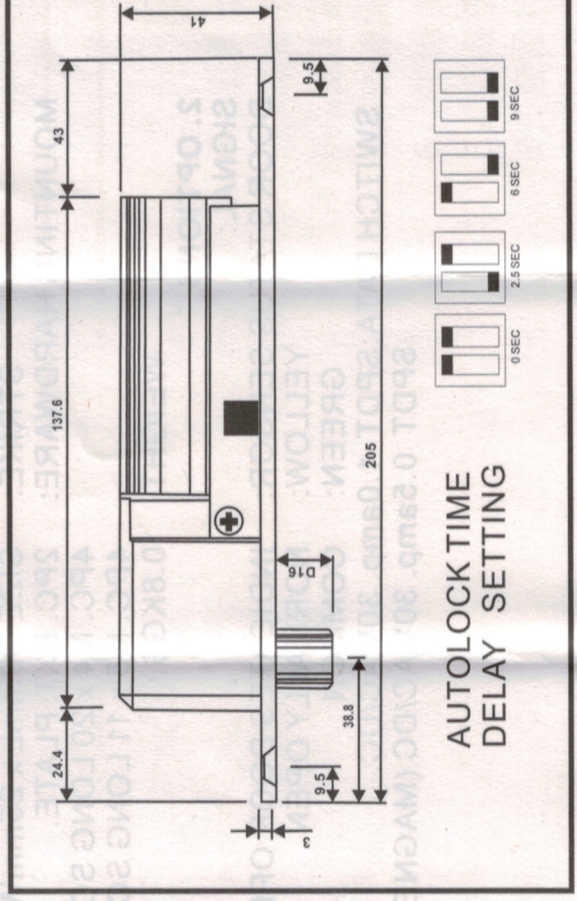
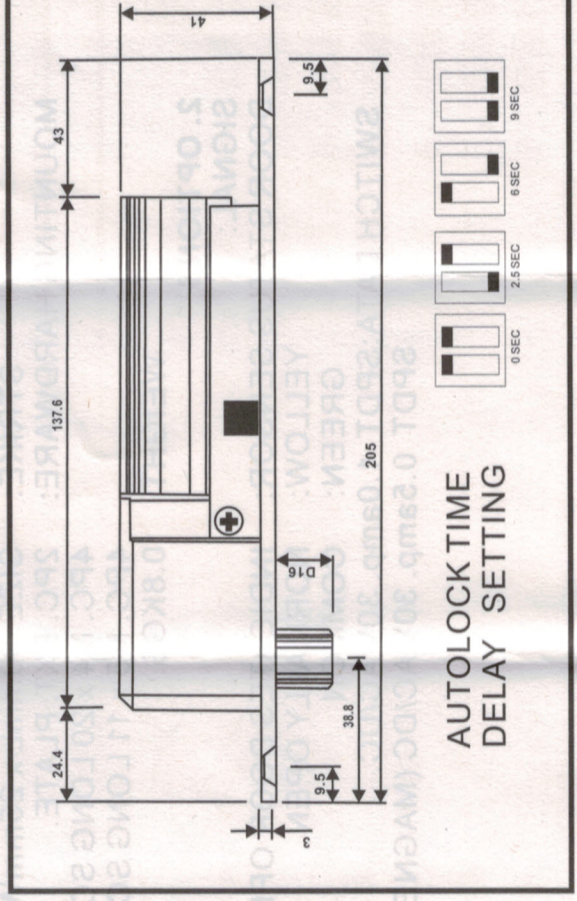
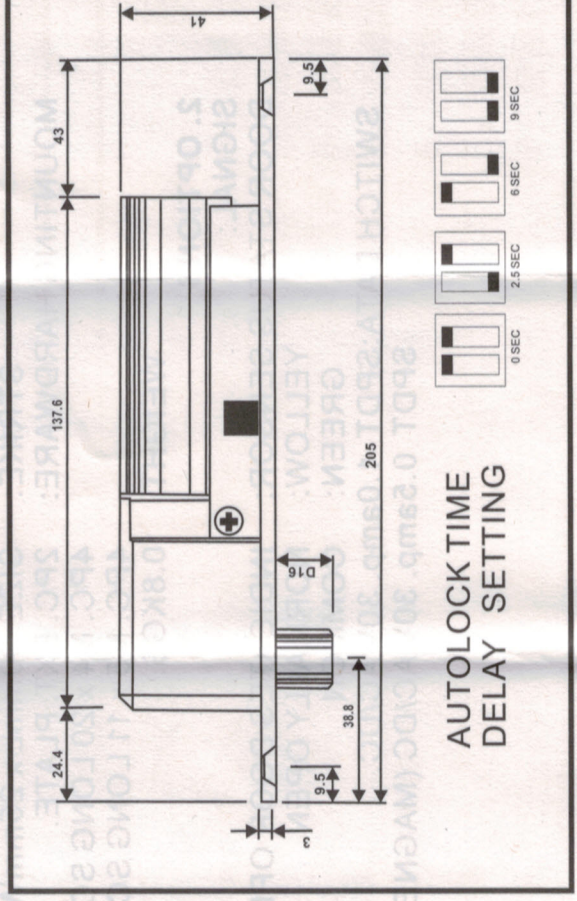
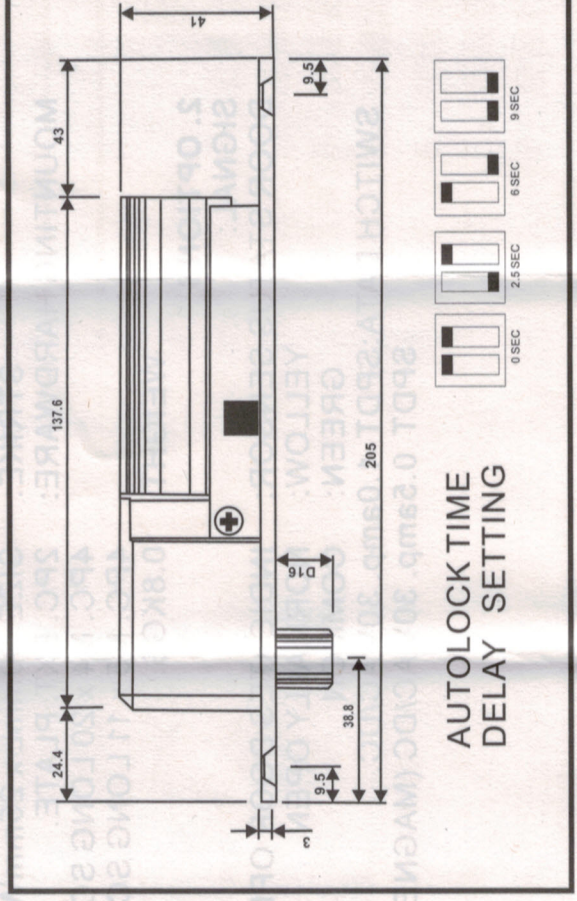
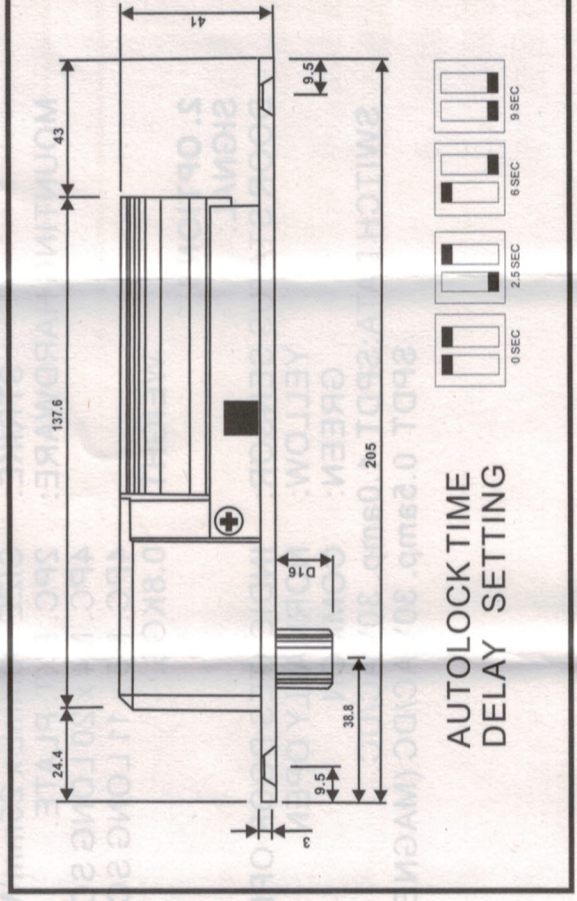
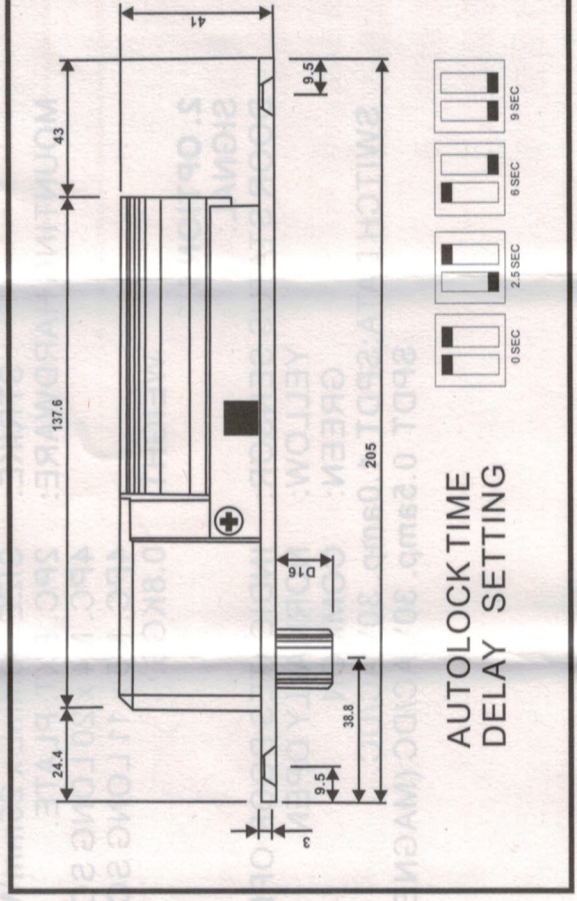
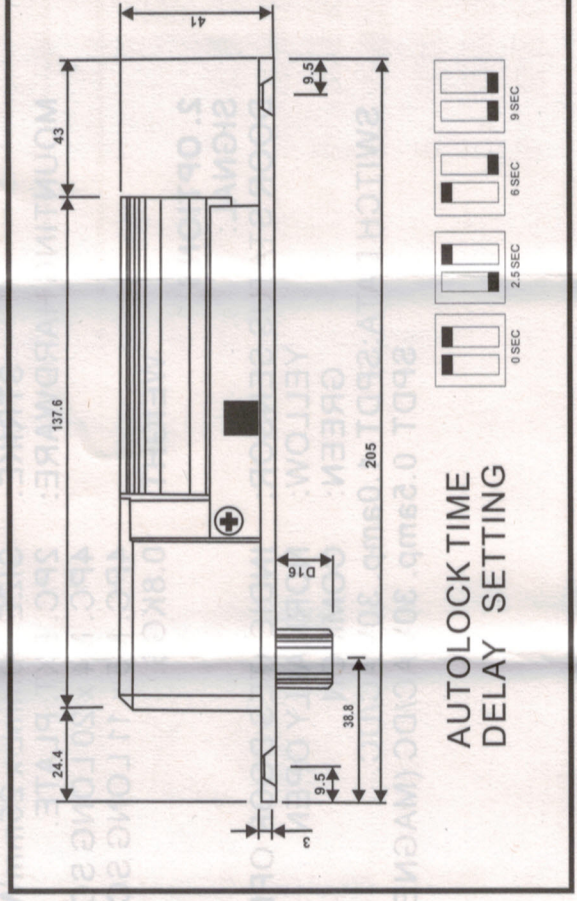
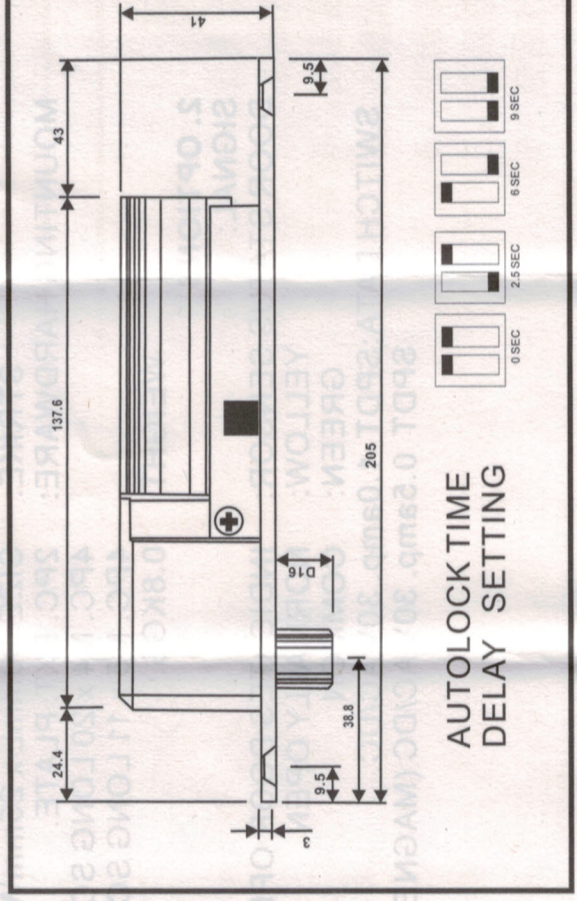
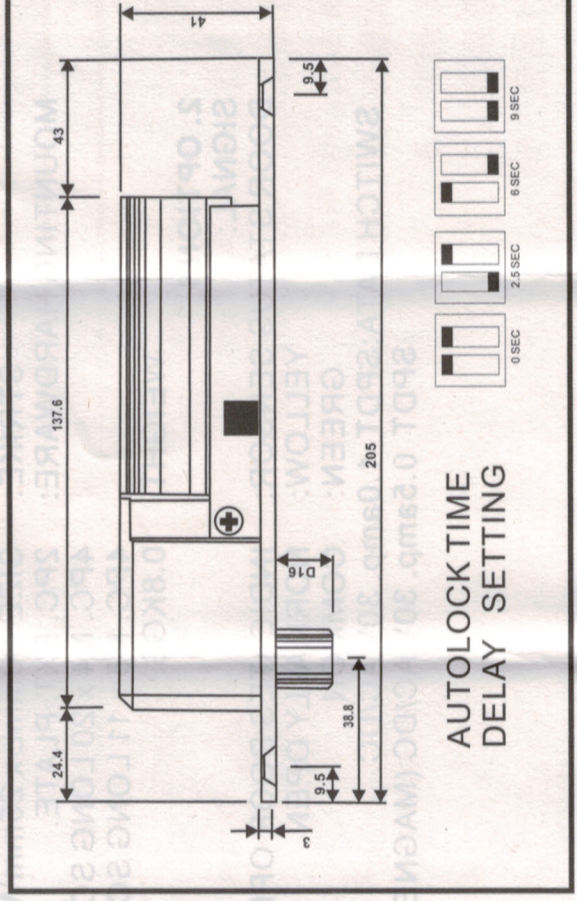
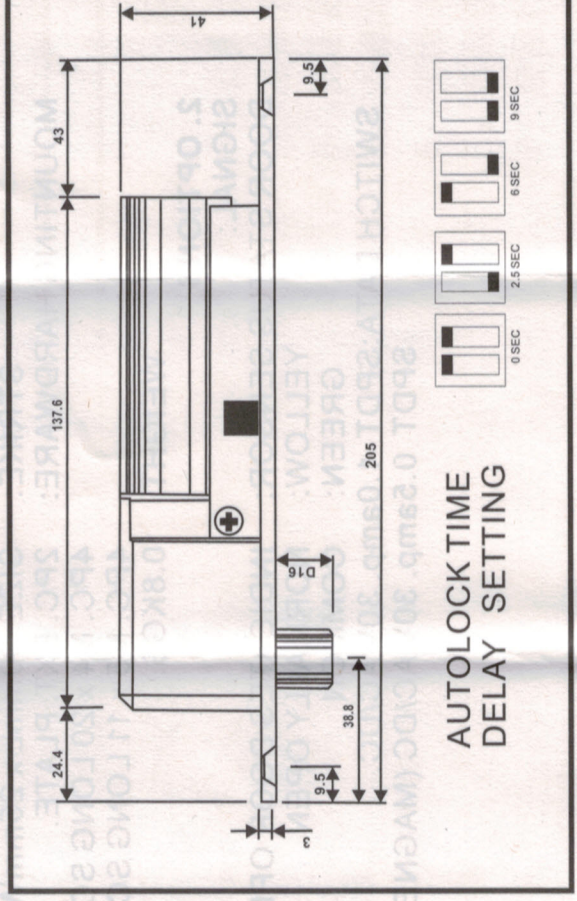
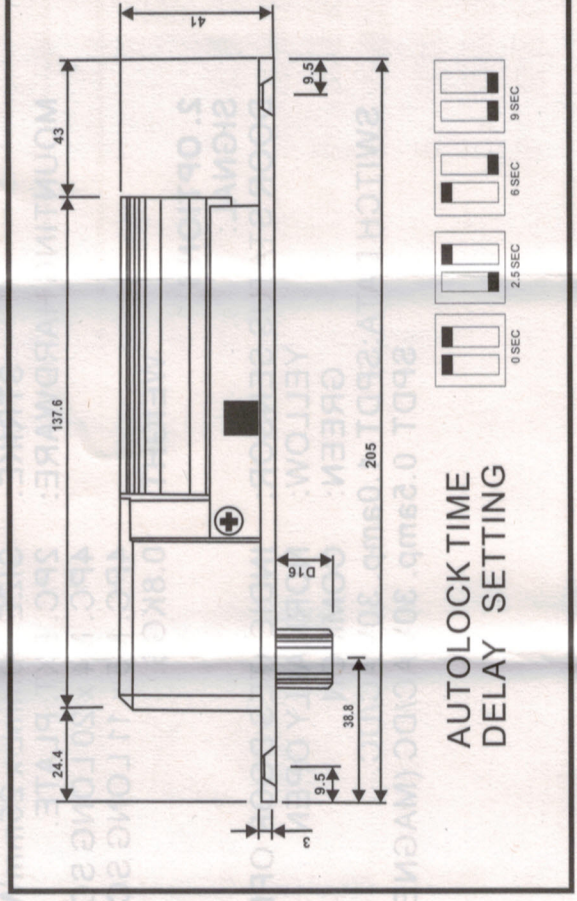
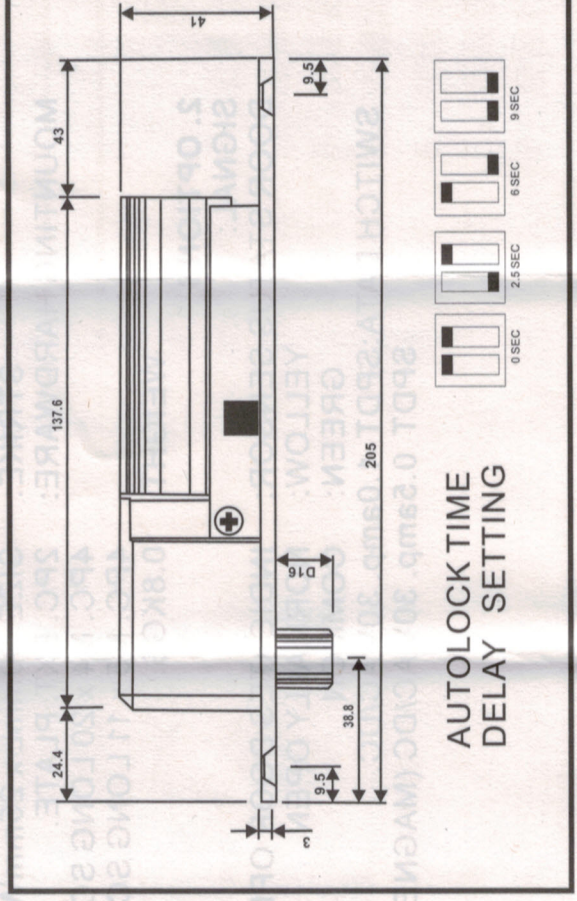
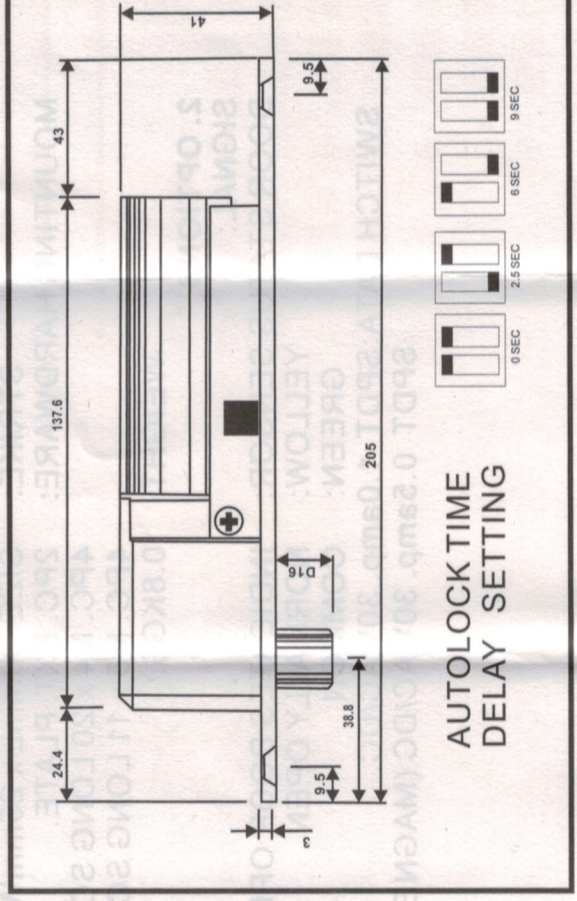
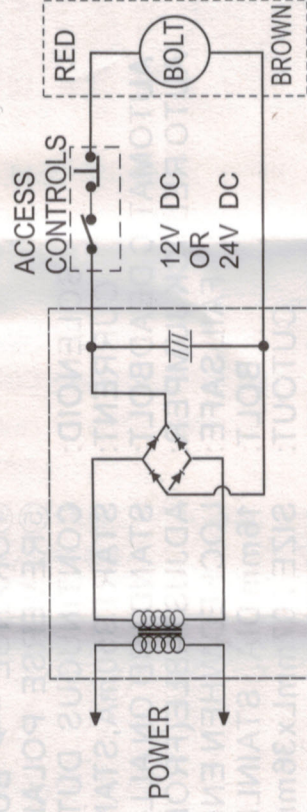



ELECTRIC BOLT

MODEL:

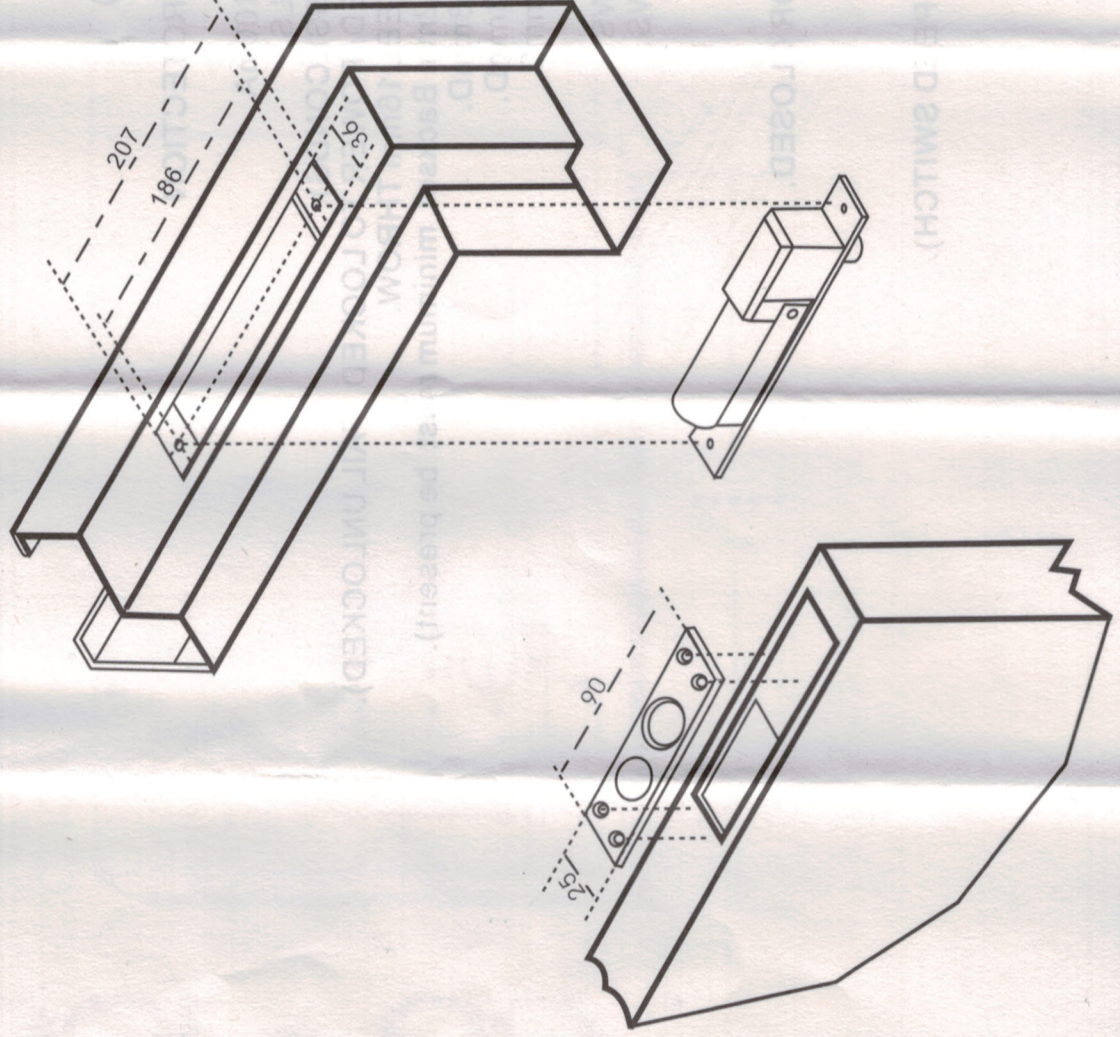

AUTOLOCK TIME
DELAY SETTING

MODEL:

1. SPECIFICATIONS

STANDARD VOLTAGE:

- ① 12VDC 1Amp.
 - ② RED → POSITIVE(+)
 - ③ BLACK → GROUND(-)
 - ④ ORANGE → BUTTON
 - ⑤ REVERSE POLARITY PROTECTION
- CONTINUOUS DUTY

SOLENOID:

CURRENT: START 950mA, STANDBY 100mA.

AUTOMATIC DEADBOLT:

STANDARD ON ALL MODELS.

AUTO RELOCK JUMPER:

ADJUSTABLE (FROM 0 TO 9 SECONDS).

FAIL SAFE:

LOCKED WHEN ENERGIZED (POWER TO LOCKED FAIL UNLOCKED).

BOLT:

16mm DIA. STAINLESS STEEL 16mm THROW.

CUTOUT:

SIZE 207mmL x 36mmW (A 42mm Backset minimum must be present).

COVER PLATE:

SIZE 215mmL x 42mmW x 0.8mmD.

FACE PLATE:

SIZE 205mmL x 35mmW x 3mmD.

STRIKE:

SIZE 90mmL x 25mmW x 2mmD.

MOUNTING HARDWARE:

2PC. EXT. PLATE.

4PC. M4 x 20 LONG SCREWS.

4PC. M5 x 11 LONG SCREWS.

WEIGHT:

0.8KGS.

2. OPTIONS

SIGNAL:

DOOR STATUS SENSOR:

INDICATES DOOR OPEN OR CLOSED.

YELLOW:

NORMALLY OPEN

GREEN:

COMMON

SWITCH DATA: SPDT 1.0amp. 30V AC/DC.

SPDT 0.5amp. 30V AC/DC (MAGNETIC PEED SWITCH).